



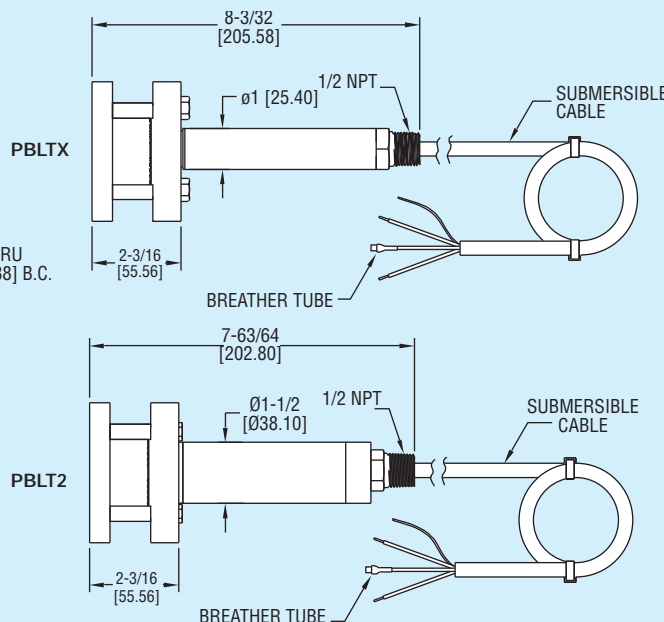

## Perfect for Sludge and Slurries, Lightning Protected, Intrinsically Safe

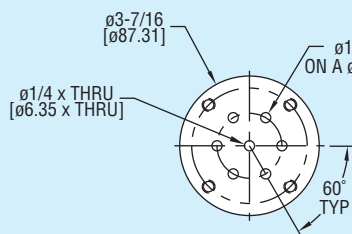

- Excellent chemical compatibility with 316 construction and ETFE cable
- Lightning and surge protection on PBLT2 models
- Maintenance free vent filter
- UL approved intrinsically safe on PBLTX models
- Large diameter, non-clogging, damage resistant, 316 SS diaphragm seal

**Agency Approvals:** PBLT2: None, PBLTX: CE, UL intrinsically safe for Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III, Div. 1. (According to control drawing 01-700797-00)

- Wastewater: sludge pits, clarifiers, digesters; alum tanks; chemical storage tanks; oil tanks; lime slurry; slumps; reservoirs.

MTL5041, intrinsically safe galvanic isolator  
MTL7706, intrinsically safe zener barrier